

HALO RECESSED DOWNLIGHT



Direct Mount
p. 9-13



Surface Mount
p. 14-15



Downlight/Adjustable
p. 15-17



Housing/Trim
p. 20-23





HLB LED Direct Mount Downlight

HALO

- Ultra-thin downlight in 3, 4, 6, 8 and 12-inch sizes
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Field-selectable CCT: 2700K - 5000K; 90 CRI
- Install from below the ceiling in as little as 3-1/2-inch plenum height
- Remote driver/junction box; Insulated ceiling (IC) and non-IC rated
- 120V or Universal 120-277V models available



HLB3059FS1EMWR



HLB4S069FS1EMWR



HLB6099FS1EMWR



HLB8LS9FSE010MWR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLB3059FS1EMWR	3" Module, Round	White	40W INC	2700K-5000K	120V	500	9	720	080083151301	N/A
HLB3S059FS1EMWR	3" Module, Square	White	40W INC	2700K-5000K	120V	500	9	720	080083151325	2336938
HLB4SP069FS1EMWR	4" Module, Square	White	65W INC	2700K-5000K	120V	600	10	672	080083909667	2347583
HLB4069FS1EMWR	4" Module, Round	White	65W INC	2700K-5000K	120V	752	12	864	080083848140	2322243
HLB4069FSE010MWR	4" Module, Round	White	60W INC	2700K-5000K	120-277V	750	11	756	080083912261	2351376
HLB4S069FS1EMWR	4" Module, Square	White	65W INC	2700K-5000K	120V	752	12	756	080083863303	2331662
HLB4S069FSE010MWR	4" Module, Square	White	60W INC	2700K-5000K	120-277V	725	11	432	080083912308	2351374
HLB6099FS1EMWR	6" Module, Round	White	65W INC	2700K-5000K	120V	1103	16	648	080083848164	2322242
HLB6S099FS1EMWR	6" Module, Square	White	65W INC	2700K-5000K	120V	1103	12	540	080083863389	2331663
HLB6099FSE010MWR	6" Module, Round	White	75W INC	2700K-5000K	120-277V	1061	15	450	080083912285	2351377
HLB6S099FSE010MWR	6" Module, Square	White	75W INC	2700K-5000K	120-277V	1050	15	360	080083912322	2351375
HLB8169FS1EMWR	8" Module, Round	White	90W INC	2700K-5000K	120V	1600	21	144	080083150601	2358047
HLB8LS9FSE010MWR	8" Module, Round	White	150W INC	2700K-5000K	120-277V	2400	31	144	080083083367	2358045
HLB12LS9FSE010MWR	12" Module, Round	White	150W INC	2700K-5000K	120-277V	2400	32	144	080083088782	N/A

HLB LED Lite Direct Mount Downlight

HALO

- Ultra-thin LED lens downlight in 4 and 6-inch sizes with remote driver / junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Features a round polymer trim and smooth lens
- Field-selectable CCT: 2700K - 5000K; 90 CRI
- Install from below the ceiling in 3/8-inch to 5/8-inch thick ceilings



HLBLS6099FS231EMWR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLBLS4069FS231EMWR	4" Module, Round	White	60W INC	2700K - 3500K	120V	753	10	576	080083912346	2349484
HLBLS4069FS351EMWR	4" Module, Round	White	60W INC	3000K - 5000K	120V	716	10	576	080083916368	2349485
HLBLS6099FS231EMWR	6" Module, Round	White	75W INC	2700K - 3500K	120V	954	13	600	080083912360	2349475, 2349476, 2349477
HLBLS6099FS351EMWR	6" Module, Round	White	75W INC	3000K - 5000K	120V	940	13	600	080083916382	2349478, 2349479, 2349480



RL LED Baffle Trim Direct Mount

HALO

- 4 and 6-inch regressed LED lens downlights with remote driver/ junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Can be installed in ½-inch to 1 ¼-inch thick ceilings
- Insulated ceiling (IC) and non-IC rated; Dimmable to 5% (120V dimmers); Airtight



RL4069S1EWHDM



RL6069S1EWHDM

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4069S1EWHDM	4" Direct Mount Module	White	65W INC	2700K-5000K	120V	652	9	300	080083858101	2325604
RL6069S1EWHDM	6" Direct Mount Module	White	65W INC	2700K-5000K	120V	719	9	240	080083858125	2325603

RA LED Baffle Trim Direct Mount Adjustable Gimbal

HALO

- 4 and 6-inch adjustable gimbal downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 360° rotation and 35° tilt; Dimmable to 5% (120V dimmers)
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Insulated ceiling (IC) and non-IC rated; Airtight



RA6069S1EWHDMR



RA4069S1EWHDMR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RA4069S1EWHDMR	4" Adjustable Direct Mount	White	60W INC	2700K - 5000K	120V	768	9	392	080083911325	2351865
RA6069S1EWHDMR	6" Adjustable Direct Mount	White	60W INC	2700K - 5000K	120V	770	9	160	080083911349	2351876



LT LED Selectable Direct Mount

HALO

- 3, 4 and 6-inch smooth splay downlights with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Field-selectable CCT: 2700K, 3000K, & 3500K or 3000K, 4000K, & 5000K; 90 CRI
- Dimmable down to 10% with select phase cut dimmers
- Insulated ceiling (IC) and non-IC rated; Deadfront; Air-tite



LT3059FS231EWHDMR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LT3059FS231EWHDMR	3" Direct Mount Module	White	40W INC	2700K-3500K	120V	500	7	588	080083159680	2373973
LT3059FS351EWHDMR	3" Direct Mount Module	White	40W INC	3000K-5000K	120V	500	7	588	080083159628	2373976
LT4069FS231EWHDMR	4" Direct Mount Module	White	40W INC	2700K-3500K	120V	600	7	336	080083159925	2374009
LT4069FS351EWHDMR	4" Direct Mount Module	White	40W INC	3000K-5000K	120V	600	7	336	080083159642	2374012
LT6089FS231EWHDMR	6" Direct Mount Module	White	65W INC	2700K-3500K	120V	800	8	288	080083159963	2374019
LT6089FS351EWHDMR	6" Direct Mount Module	White	65W INC	3000K-5000K	120V	800	9	288	080083159666	2374021

SMD LED Direct Mount Module

HALO

- Ultra-low profile downlight in 4 and 6-inch sizes with integral junction box
- High performance and wide distribution for general areas
- Direct Mount with spring clips into drywall/suspended ceiling (no j-box or housing required)
- Modern look suitable for residential and commercial installations; 90 CRI
- Insulated ceiling (IC) and non-IC rated



SMD4R6930WHDM



SMD6R6930WHDM



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SMD4R6930WHDM	4" Direct Mount	White	65W INC	3000K	120V	700	10	300	080083766390	2281593
SMD6R6930WHDM	6" Direct Mount	White	65W INC	3000K	120V	750	10	192	080083767090	2281592

HLA LED Direct Mount Adjustable Gimbal

HALO

- 4-inch adjustable gimbal downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 360° rotation and 30° tilt; Distributions: 40° flood, 80° very wide flood
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Remote driver/junction box installs through the ceiling cutout and positioned remotely
- Insulated ceiling (IC) and non-IC rated; Dimmable down to 5% (120V dimmers); Airtight



HLA406FL9FS1EMWR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLA406FL9FS1EMWR	4" Adjustable Direct Mount	White	65W INC	2700K-5000K	120V	660	11	504	080083882960	2341271

LCR Light Commercial LED Direct Mount Downlight



HALO

- Light commercial downlight in 2, 4, 6 and 8-inch sizes
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Regressed lens and smooth baffle provide high optical cutoff
- Wide distribution pattern is ideal for general area illumination; Airtight



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LCR2089FS1EMW	2" LCR Direct Mount	White	65W INC	2700K - 5000K	120-227V	800	9	480	080083130061	2357903
LCR2089FSE010MW	2" LCR Direct Mount	White	65W INC	2700K - 5000K	120-227V	800	9	480	080083889969	2351780
LCR4089FSE010MW	4" LCR Direct Mount	White	65W INC	2700K - 5000K	120-227V	800	9	360	080083889983	2351828
LCR4129FSE010MW	4" LCR Direct Mount	White	75W INC	2700K - 5000K	120-227V	1200	15	360	080083890002	2351827
LCR6159FSE010MW	6" LCR Direct Mount	White	72W INC	2700K - 5000K	120-277V	1604	16	120	080083890026	2351826
LCR6219FSE010MW	6" LCR Direct Mount	White	72W INC	2700K - 5000K	120-277V	2329	25	120	080083890040	2351825
LCR6309FSE010MW	6" LCR Direct Mount	White	130W INC	2700K - 5000K	120-277V	2981	30	96	080083890064	2351824
LCR8309FSE010MW	8" LCR Direct Mount	White	130W INC	2700K - 5000K	120-277V	3153	35	128	080083890088	2351823
LCR8509FSE010MW	8" LCR Direct Mount	White	130W INC	2700K - 5000K	120-277V	4841	47	128	080083890101	2351822

Direct Mount Mounting Frame

HALO

- 4, 6 and 8-inch new construction frames for round and square products; Knock-outs allow square fittings
- Accepts fixtures including remodel housings and direct-mount downlights
- Use to reserve the ceiling location or install products that need bar hangers
- Provides routing guidance for the drywall contractor
- Bar hangers adjust up to 24-inches wide and can be shortened without removal
- Compatible with the HLB, RL, RA, HLA and LCR direct mount series



Catalog Number	Product Description	Pallet Quantity	UPC
HL4RSMF	4" Round/Square Mounting Frame	180	080083876167
HL6RSMF	6" Round/Square Mounting Frame	240	080083876181
HL8RSMF	8" Round/Square Mounting Frame	240	080083890460

Direct Mount Product Selection Guide



		HLB	RL-DM & RA-DM	SMD-DM	HLA	LCR	LT-DM
APPLICATION	Flush Lens	✓		✓			
	General Area Illumination	✓	✓	✓	✓	✓	✓
	Wet Location	✓	✓	✓	✓	✓	✓
	New Construction	✓	✓	✓	✓	✓	✓
	Remodel	✓	✓	✓	✓	✓	✓
	Adjustable		✓		✓		

FEATURES / PERFORMANCE	Size / Shape	3", 4", 6" Round & Square 8" & 12" Round	4" & 6" Round	4" & 6" Round & Square	4" Round	2", 4", 6" & 8" Round	3", 4" & 6" Round
	Lumens (Max)	2400	600	800	600	8000	805
	Lite (L70B50)	50K hours	70K hours	50K hours	50K hours	50K hours	35K hours
	CRI	90 (min)	90 (min)	90 (min)	90 (min)	90 (min)	90 (min)
	CCT (K)	27/30/35/40/50	27/30/35/40/50	27/30/35/40/50	27/30/35/40/50	27/30/35/40/50	27/30/35/30/40/50
	Spacing Criteria	1.4	1.2	1.4	1.4	1.2	1.4
	Input Voltage	120/120-277	120	120	120	120-277	120

CONTROL	Field Select CCT	✓ (5) CCT	✓ (5) CCT		✓ (5) CCT	✓ (5) CCT	✓ (3) CCT
	LE/TE Phase Cut	✓	✓	✓	✓		✓

Visit [Cooperlighting.com/MarketPro](https://www.cooperlighting.com/MarketPro) to download the Recessed Selection Guide.

SLD LED Surface Mount Module

HALO

- Ultra-low profile 4 and 6-inch surface luminaire with downlighting distribution
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Ceiling or wall mounting in standard and fire-rated compatible junction boxes
- SLD6 retrofits in 5-inch and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Supply wire adapter with LED quick wiring connector included
- Suitable for residential or commercial installations



SLDSL4069S1EMWR



SLDSL6069S1EMWR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SLDSL4069S1EMWR	4" Surface Downlight	White	65W INC	2700K-5000K	120V	600	9	700	080083153107	2366149
SLDSL6069S1EMWR	6" Surface Downlight	White	65W INC	2700K-5000K	120V	600	9	400	080083153121	2366163
SLD6129S1EMWR	6" Surface Downlight	White	75W INC	2700K-5000K	120V	1200	15	400	080083153145	2373952
SLD6129SE010MWR	6" Surface Downlight	White	75W INC	2700K-5000K	120-277V	1200	15	400	080083153169	2373954
SLDACCKIT	4" and 6" SLD Accessory Kit	N/A	N/A	N/A	N/A	N/A	N/A	1100	080083159819	2373954

HLC LED Surface Mount Closet Light

HALO

- 6-inch low-profile, lens surface-mount luminaire; Ceiling/wall mounting
- Below the ceiling installation, no clips or plates needed
- Installs in most 3-1/2-inch and 4-inch square, octagon or round junction and pancake boxes
- Supply wire adapter with LED quick wiring connector included; Sold as bulk packs only
- Meets NFPA requirements for use in closets



HLC6099301EWH-6BP

Catalog Number	Product Description	Finish	Replaces up to	CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLC6099301EWH-6BP	6" Closet Light (6-Pack)	White	65W INC	3000K	120V	925	16	100	080083896448	2338422
HLC6099301EWH-12BP	6" Closet Light (12-Pack)	White	65W INC	3000K	120V	900	16	60	080083884728	2338422
HLC6099401EWH-6BP	6" Closet Light (6-Pack)	White	65W INC	5000K	120V	900	16	125	080083896462	2338423

BLD LED Surface Mount Module

HALO

- 4 and 6-inch low-profile, high-performance, backlit surface-mount luminaire
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Installs in most 3-1/2-inch and 4-inch square, octagon or round junction and pancake boxes
- Retrofits in 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings



BLD4089SWH



BLD6089SWHR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
BLD4089SWH	4" Surface, Direct Mount	White	65W INC	2700K-5000K	120V	802	10	560	080083826766	2319361
BLD6089SWHR	6" Surface, Direct Mount	White	65W INC	2700K-5000K	120V	812	10	320	080083826803	2319364

See Pages 18-19 for California T20 Certified SKU's

SMD LED Surface Mount Module

HALO

- 4, 6, and 12-inch high-performance, ½-inch low-profile, lens luminaire with wide distribution
- Field-selectable CCT: 2700K - 5000K via a switch
- Ceiling/Wall mounting in many 3½- and 4-inch square, octagon or round junction boxes
- Retrofits 4-inch and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Supply wire adapter with LED quick wiring connector included
- Dimmable to 5% (120V dimmers); 90 CRI



SMD4R6930WH



SMD6R12927WH



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SMD4R69SWH	4" RD Surface Mount	White	60W INC	Selectable 2700K-5000K	120V	738	9	320	080083020904	2365919
SMD6R69SWH	6" RD Surface Mount	White	60W INC	Selectable 2700K-5000K	120V	777	9	320	080083020942	2365923
SMD12R209SWHE	12" RD Surface Mount	White	N/A	Selectable 2700K-5000K	120V	2,232	27	144	080083138005	N/A

RL LED Baffle Trim Downlight

HALO

- LED baffle-trim module for 3, 4, 5 or 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Regressed lens; Convex form and lamp-like appearance; Uniform illumination
- Field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K via a switch; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers, Dimmable down to 5%
- Suitable for new construction, remodel and retrofit installation



RL3059FS1EWHR



RL56099S1EWHR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL3059FS1EWHR	3" Retrofit Downlight	White	60W INC	2700K-5000K	120V	587	8	504	080083130047	2353426
RL4069S1EWHR	4" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	621	9	768	080083818488	2354585
RL4099S1EWHR	4" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	1006	12	576	080083818501	2321466
RL56069S1EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	712	8	300	080083818525	2356074
RL56099S1EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	1006	12	360	080083818549	2354587
RL56129S1EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	1272	14	240	080083818563	2321465

See Pages 18-19 for California T20 Certified SKU's

RA LED Adjustable Gimbal

HALO

- Adjustable gimbal LED module for 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- 360° rotation and 35° tilt; Wide distribution
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers
- Suitable for new construction, remodel and retrofit installation



RA4069S1EWHR



RA56069S1EWHR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RA4069S1EWHR	4" Retrofit Adjustable, Wide	White	65W INC	2700K-5000K	120V	615	7	420	080083817849	2319905
RA56069S1EWHR	5/6" Retrofit Adjustable, Wide	White	65W INC	2700K-5000K	120V	630	7	240	080083817863	2319904

See Pages 18-19 for California T20 Certified SKU's

LT LED Baffle Trim Downlight

HALO

- Baffle downlight or Smooth Splay retrofits
- Installs in 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Field-selectable CCT: 2700K, 3000K, & 3500K or 3000K, 4000K, & 5000K; 90 CRI
- Torsion springs or friction blades secure trim tightly
- Dimmable down to 10% with select phase cut dimmers
- Suitable for use in showers or in outdoor covered ceiling applications; Airtight, T20 compliant



LT560WH12930



LTSS56069FS231EWHWR



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LT460WH6930R	4" Retrofit Baffle-Trim	White	60W INC	3000K	120V	554	8	576	080083746163	2309297
LT560WH6930R	5/6" Retrofit Baffle-Trim	White	60W INC	3000K	120V	683	10	240	080083746187	2309300
LT560WH12930	5/6" Retrofit Baffle-Trim	White	90W INC	3000K	120V	1140	12	240	080083798681	2333089
LT4069FS231EWHR	4" Retrofit Baffle-Trim	White	40W INC	Selectable 2700K-3500K	120V	600	7	576	080083162406	2371503
LT4069FS351EWHR	4" Retrofit Baffle-Trim	White	40W INC	Selectable 3000K-5000K	120V	600	7	576	080083162420	2371504
LT56069FS231EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	Selectable 2700K-3500K	120V	600	7	300	080083162468	2371505
LT56069FS351EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	Selectable 3000K-5000K	120V	600	7	240	080083162482	2371506
LTSS4069FS231EWHWR	4" Retrofit Smooth Splay Trim	White	40W INC	Selectable 2700K-3500K	120V	600	7	576	080083162529	2371511
LTSS4069FS351EWHWR	4" Retrofit Smooth Splay Trim	White	40W INC	Selectable 3000K-5000K	120V	600	7	576	080083162543	2371512
LTSS56069FS231EWHWR	5/6" Retrofit Smooth Splay Trim	White	65W INC	Selectable 2700K-3500K	120V	600	7	240	080083162581	2371513
LTSS56069FS351EWHWR	5/6" Retrofit Smooth Splay Trim	White	65W INC	Selectable 3000K-5000K	120V	600	7	240	080083162604	2371514

See Pages 18-19 for California T20 Certified SKU's

LA LED Adjustable Gimbal

HALO

- Adjustable LED retrofit modules for 4-inch and 5/6-inch aperture recessed housings
- Regressed lens; 360° rotation and 35° tilt; Dimmable to 10%
- Retrofits 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Torsion springs or friction blades secure trim tightly
- Precision construction and uniform illumination, 90 CRI; Airtight



LA4069301EWH



LA56069301EWH



Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LA4069301EWH	4" Retrofit Adjustable, Plastic, Wide	White	40W INC	3000K	120V	613	9	504	080083818143	2325616
LA56069301EWH	5/6" Retrofit Adjustable, Plastic, Wide	White	40W INC	3000K	120V	637	9	180	080083818242	2325606

RSQ All-Purpose Square LED Downlight



HALO

- Offered in 3 sizes for 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Regressed flat lens with step baffle provides visual comfort and glare control
- Wide distribution patterns work well in low to high ceilings for general
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers, Dimmable down to 5%
- Suitable for new construction, remodel and retrofit installation



RSQ4089FS1EMWWB



RSQ5089FS1EMWWB



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RSQ4089FS1EMWWB	4" Retrofit Square Baffle-trim	White	60W INC	2700K-5000K	120V	800	10	672	080083824496	2333094
RSQ5089FS1EMWWB	5" Retrofit Square Baffle-trim	White	60W INC	2700K-5000K	120V	900	10	360	080083824595	2333267
RSQ6089FS1EMWWB	6" Retrofit Square Baffle-trim	White	60W INC	2700K-5000K	120V	900	10	240	080083824694	2333093

See Pages 18-19 for California T20 Certified SKU's



HALO Title 20 California Certified Products

Downlight • Surface Mount • Adjustable Downlight

We offer a range of Title-20 recessed downlighting fixtures suitable for sale and installation in California. Code-compliance is our foundation. Rest assured we've got the products you need to get the job done on time and on budget.



RL LED Baffle Trim Downlight (For details, see pg. 15)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4069S1EWHR-CA	4" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	570	7	768	080083888108	2326218
RL4099S1EWHR-CA	4" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	941	10	576	080083888122	2321466
RL56069S1EWHR-CA	5/6" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	665	8	300	080083888146	2326217
RL56099S1EWHR-CA	5/6" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	900	10	360	080083888160	2326219
RL56129S1EWHR-CA	5/6" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	1221	14	240	080083888184	2321465



RA LED Adjustable Gimbal (For details, see pg. 16)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RA4069S1EWHR-CA	4" Retrofit Adjustable, Wide	White	65W INC	2700K - 5000K	120V	615	7	480	080083888504	2319905
RA56069S1EWHR-CA	5/6" Retrofit Adjustable, Wide	White	65W INC	2700K - 5000K	120V	630	7	240	080083888481	2319904



LT LED Retrofit Baffle Trim Downlight (For details, see pg. 16)

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LT460WH6930R-CA	4" Retrofit Baffle-Trim	White	60W INC	3000K	120V	650	7	576	080083900893	2257770, 2277227
LT560WH6930R-CA	5/6" Retrofit Baffle-Trim	White	60W INC	3000K	120V	729	8	240	080083900954	2252183, 2277232



RSQ All-Purpose Square LED Downlight (For details, see pg. 17)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RSQ4089FS1EMWWB-CA	4" Retrofit Square Baffle-trim	White	N/A	2700K - 5000K	120V	800	10	672	080083886425	2362695
RSQ5089FS1EMWWB-CA	5" Retrofit Square Baffle-trim	White	60W INC	2700K - 5000K	120V	830	10	360	080083886487	2333267
RSQ6089FS1EMWWB-CA	6" Retrofit Square Baffle-trim	White	N/A	2700K - 5000K	120V	800	10	240	080083886548	2362697



BLD LED Surface Mount Module (For details, see pg. 14)


Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
BLD6089SWHR-CA	6" RD Surface, Direct Mount	White	65W INC	2700K - 5000K	120V	812	10	320	080083888443	2319364





HALO®

Fire Safe Fire Rated Housings

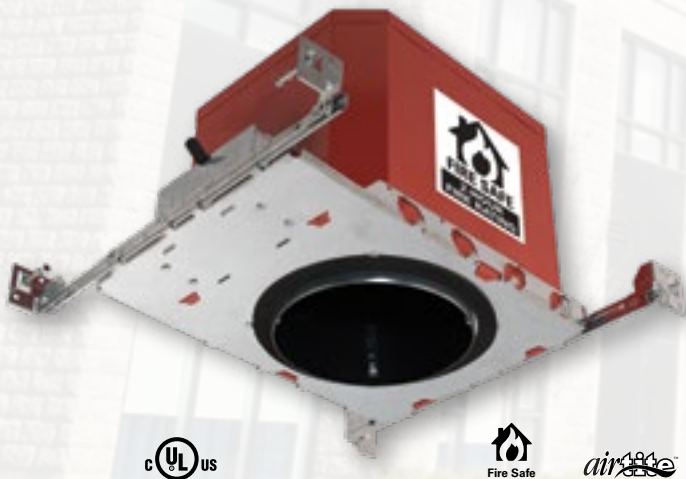

- Available in 4, 5 and 6-inch new construction LED housings.
- New construction housings preventing the passage of flames and toxic gases into ceiling plenums.
- For use with LED integrated trims or modules.
- No need for additional fire rated boxes.
- Suitable for use in multi-family and mixed use applications requiring up to 2 hours of protection.
- For installation in insulated ceiling (IC) and non-IC rated ceilings; Airtight.

HALO Fire Rated Housings can prevent the passage of flames and toxic gases for up to two hours in accordance to UL 263.

FIRE RATED **UP TO 2 HOURS**

Catalog Number	Product Description	Socket	Lamp Source*	Voltage	Pallet Quantity	UPC
H450FR2ICAT	4" Fire Rated Housing	LED	LED	120V	80	080083134007
H450FR2ICATD010	4" Fire Rated Housing, 0-10V	LED	LED	120V	80	080083130504
H550FR2ICATD010	5" Fire Rated Housing, 0-10V	LED	LED	120V	40	080083130528
H750FR2ICAT	6" Fire Rated Housing	LED	LED	120V	80	080083134021

H450FR2ICAT / H450FR2ICATD010

Compatible with the following 4-inch HALO LED modules

BLD4	RA4	SLD4
LT4	RL4	SMD4
LA4	RSQ4	ML4

H550FR2ICATD010

Compatible with the following 5-inch HALO LED modules

SMD6	LT56	RL56
SLD6	LA56	RA56
RSQ5	ML56	

H750FR2ICAT

Compatible with the following 6-inch HALO LED modules

BLD6	RA56	SLD6
LT56	RL56	SMD6
LA56	RSQ6	

H Series Housings

HALO

- The standard in the industry for both commercial and residential applications
- Optimized and listed for EISA compliant tungsten-halogen lamps and incandescent, CFL and LED lamps
- For installation in insulated ceiling (IC) and non-IC rated ceilings with airtight code compliant construction
- Use with a variety of trims and finishes for different lighting effects or match any decor
- Wide variety of trims available for desired lighting effect



H27RICAT



H27ICAT



Catalog Number	Product Description	Socket	Lamp Source*	Voltage	Pallet Quantity	UPC
H245ICAT	4" New Construction Ultra Shallow	Quick Connect (No Socket)	LED Modules	120/277V	180	080083770717
H245RICAT	4" Remodel Ultra Shallow	Quick Connect (No Socket)	LED Modules	120-277V	540	080083756520
H2750ICAT	6" New Construction, Shallow, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	144	080083618163
H27ICAT	6" New Construction, Shallow Ceiling, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	144	662400605898
H27RICAT	6" Remodel, Shallow Ceiling, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	180	080083609253
H550ICAT	5" New Construction, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	120	080083626533
H550RICAT	5" Remodel, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	144	080083626557
H5ICAT	5" New Construction, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	120	080083609413
H5ICATNB	5" New Construction, IC Air-Tite, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	120	080083756063
H5RICAT	5" Remodel, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	144	080083609444
H750ICAT	6" New Construction, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	120	623961872655
H750RICAT	6" Remodel, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	144	623961052248
H7ICAT	6" New Construction, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	120	080083609628
H7ICATNB	6" New Construction, IC Air-Tite, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	120	662400612032
H7ICT	6" New Construction, IC	E26	HAL., INC., LED, CFL	120V	120	080083609680
H7ICTNB	6" New Construction, IC, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	120	662400608523
H7RICAT	6" Remodel, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	144	662400610588
H7RICT	6" Remodel, IC	E26	HAL., INC., LED, CFL	120V	144	662400600718
H995ICAT	4" New Construction, IC Air-Tite, Shallow	Quick Connect (No Socket)	LED Modules	120/277V	144	080083616930
H995RICAT	4" Remodel, IC Air-Tite, Shallow	Quick Connect (No Socket)	LED Modules	120/277V	162	080083616947
H99ICAT	4" New Construction, IC Air-Tite, Shallow	E26	HAL., INC., LED, CFL	120V	144	080083582259
H99RTAT	4" Remodel, Non-IC, Air-Tite, Shallow	E26	HAL., INC., LED, CFL	120V	252	080083584369
H99TAT	4" New Construction, Non-IC, Air-Tite, Shallow	E26	HAL., INC., LED, CFL	120V	192	080083584260



HL3 New Construction Housings

HALO

- Suitable for 2x6 residential or shallow plenum commercial
- Broad range of trims; Distribution can easily be changed in the field
- Field-interchangeable optics: 15°, 25°, 40° and 55°
- Locking 365° rotation and 45° tilt holds any aiming position
- Got Nail!™ bar hangers; Insulated Ceiling (IC) rated



Catalog Number	Product Description	Socket	Lamp Source	Voltage	Pallet Quantity	UPC	ENERGY STAR Unique ID
HL36A20927ED010ICAT	3" shallow new construction directional housing	LED	LED	120-277V	72	080083185214	2332452
HL36A20930ED010ICAT	3" shallow new construction directional housing	LED	LED	120-277V	72	080083185207	2332452

E Series Housings

HALO

- Compact and efficient housings for new or retrofit residential or light commercial construction
- Optimized and listed for EISA compliant tungsten-halogen lamps and incandescent, CFL and LED lamps
- For installation in insulated ceiling (IC) and non-IC rated ceilings; Airtight code compliant
- Includes ultra-shallow housings for application with limited plenum space
- Use with a variety of trims and finishes for different lighting effects or match any decor



Catalog Number	Product Description	Socket	Lamp Source*	Voltage	Pallet Quantity	UPC
E27ICAT	6", IC, Shallow, New Construction	E26	HAL., INC., LED, CFL	120V	192	080083737604
E27RICAT	6", IC, Shallow, Remodel	E26	HAL., INC., LED, CFL	120V	192	080083737482
E4ICATSB	4", IC, Shallow, New Construction	E26	HAL., INC., LED, CFL	120V	108	080083751525
E4RTATSB	4" NON-IC Air-Tite, Remodel, w/Socket Bracket	E26	HAL., INC., LED, CFL	120V	168	080083751501
E4TATSB	4" NON-IC, Air-Tite, New Construction w/Socket Bracket	E26	HAL., INC., LED, CFL	120V	192	080083751488
E5ICAT	5" IC, Air-Tite, New Construction	E26	HAL., INC., LED, CFL	120V	144	080083737420
E5ICATNB	5" IC, Air-Tite, New Construction, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	144	080083737390
E5RICAT	5" IC, Air-Tite, Remodel	E26	HAL., INC., LED, CFL	120V	180	080083737307
E750ICAT	6" IC, Air-Tite, LED New Construction	Quick Connect (No Socket)	LED Modules	120-277V	144	080083775040
E750RICAT	6" IC, Air-Tite, LED Remodel	Quick Connect (No Socket)	LED Modules	120-277V	144	080083778584
E7ICAT	6" IC, Air-Tite, New Construction Housing	E26	HAL., INC., LED, CFL	120V	144	080083737727
E7ICATNB	6" IC, AIRTITE, New Construction, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	144	080083737697
E7RICAT	6" IC, Air-Tite, Remodel	E26	HAL., INC., LED, CFL	120V	144	080083737543

Note: Lamps not included.

4", 5" and 6" Trims

HALO

- Trims shape light to minimize aperture glare and reduce ceiling brightness
- Open trims focus the downlighting beam to provide uniform distribution
- Can be used in new construction and remodel housings
- Offered in a variety of styles and accept different lamp types



Catalog Number	Product Description	Finish	Lamp Source*	Pallet Quantity	UPC
4001WB	4" Step Baffle - Plastic	White	Halogen, INC, LED, CFL	576	080083745869
993W	4" Coilex Baffle	White	Halogen, INC, LED, CFL	840	080083628483
5001P	5" Metal Splay Baffle	White	Halogen, INC, LED, CFL	360	662400602729
5125WB	5" Full Cone Baffle	White	Halogen, INC, LED, CFL	288	080083743162
300P	6" Open - Socket Supporting	White	Halogen, INC, LED, CFL	288	662400302421
30WAT	6" Air-Tite Baffle	White	Halogen, INC, LED, CFL	540	662400603320
310W	6" Coilex Baffle	White	Halogen, INC, LED, CFL	360	080083515882
456W	6" Baffle for Slope Ceiling	White	Halogen, INC, LED, CFL	360	662400676287
6100WB	6" Tapered Metal Baffle, 2-Rings Narrow & Wide	White	Halogen, INC, LED, CFL	900	080083743452
6125WB	6" Full Cone Baffle	White	Halogen, INC, LED, CFL	288	080083742912



HALO HOME SMART LIGHTING SYSTEM



Smart Lights
p. 25-26



Smart Bulb
p. 26



Controllers
p. 27-28



Add-Ons
p. 29



HALO Home Smart Lights

Control any HALO Home light individually or as a group using the app or HALO Home remote Controllers. Wirelessly adjust ON/OFF, dimming to 5%, and warm to cool color temperature (2700-5000K). Automate home lighting with schedules and add Scenes to set your lighting for any mood.

HALO Home Smart HLB Downlight

- Ultra-thin smart downlight that can install virtually anywhere; No housing needed
- Easy to install from below the ceiling in as little as 1 ½-inch plenum; Remote driver/junction box
- Bluetooth-enabled and ready to pair with other HALO Home products via the HALO Home app
- No internet or bridge needed
- White tuning (2700-5000K) and dimming to 5% via app and Controllers; 90CRI



Catalog Number	Product Description	Replaces Up To	Selectable CCT (via App)	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLB4069BLE40AWH	4" Round LED Module, Remote Driver J-Box	60W INC	2700K-5000K	120V	Matte White	697	10	320	080083153022	2308008
HLB6099BLE40AWH	6" Round LED Module, Remote Driver J-Box	65W INC	2700K-5000K	120V	White	951	14	600	080083153008	2308006

HALO Home Smart Recessed Downlight

- Integrated LED modules with Bluetooth mesh connectivity for 4- and 5/6-inch recessed housings
- Pair with the HALO Home mobile app for wireless control and customization
- ON/OFF, grouping, color tuning, dimming, scheduling, scenes and more
- Add HALO Home wall controllers for expanded smart functionality
- Bluetooth-enabled and ready to pair with other HALO Home products via the HALO Home app
- White tuning (2700-5000K) and dimming to 5% via app and Controllers; 90CRI



Catalog Number	Product Description	Replaces Up To	Selectable CCT (via App)	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4069BLE40AWH	4" LED Module, Bluetooth	60W INC	2700K-5000K	120V	White	600	8	504	080083809257	2308008
RL56069BLE40AWH	5/6" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	600	10	300	080083809233	2308006

HALO Home Lumen Select Smart Recessed Downlight

- Adjust lumen output for optimal lighting in any room and ceiling height
- 4-inch module: Choose 600 or 900 lumens for mounting heights up to 12 feet
- 5/6-inch module: Choose 600, 900 or 1200 lumens for mounting heights up to 15 feet
- Bluetooth-enabled; No internet or bridge needed
- Ready to pair with other HALO Home products via the Halo Home app
- White tuning (2700-5000K) and dimming to 5% via app and Controllers; 90CRI



Catalog Number	Product Description	Replaces Up To	Selectable CCT (via App)	Voltage	Finish	Selectable Lumens (via App)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4099BLE40AWH	4" LED Module, Bluetooth	75W INC	2700K-5000K	120V	White	600 or 900	11	576	080083887415	2341226
RL56129BLE40AWH	5/6" LED Module, Bluetooth	100W INC	2700K-5000K	120V	White	600, 900, or 1,200	15	240	080083887439	2341270

HALO Home Smart Bluetooth Speaker Downlight

- Smart light with built-in speaker wirelessly connects to most Bluetooth devices
- Add downlight speakers to existing 5 or 6-inch housings
- Install as many as needed and group up to 8 speakers together per room
- White tuning (2700-5000K) and dimming to 5% via app and Controllers; 90CRI
- No internet or bridge needed



Catalog Number	Product Description	Replaces Up To	Selectable CCT (via App)	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL56069B4WHBLE	5/6" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	600	13	240	080083174430	N/A
RL56069B4WHBLE-CA	6" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	600	13	240	080083174454	N/A

HALO Home Smart Surface Mount Downlight

- Sleek, versatile smart downlight; Surface mounting, no housing required
- Simple solution to replace existing light fixtures with smart, energy-saving LED
- Easy to install; Mounts to most junction boxes including pancake boxes
- Bluetooth-enabled; No internet or bridge needed
- White tuning (2700-5000K) and dimming to 5% via app and Controllers; 90CRI
- Bluetooth-enabled and ready to pair with other HALO Home products via the HALO Home app



4-inch



6-inch



Catalog Number	Product Description	Replaces Up To	Selectable CCT (via App)	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
BLD4089BLE40AWH	4" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	800	10	600	080083897162	2346591
BLD6089BLE40AWH	6" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	800	10	400	080083897186	2346688

HALO Home Smart Bulb

- Enjoy smart lighting benefits in any fixture that accepts a standard light bulb (E26 base)
- Instantly transforms fixtures like sconces or porch lights into smart, wireless-enabled luminaires
- Suitable for indoors and outdoors (damp location listed); Not for enclosed fixtures
- Bluetooth-enabled; No internet or bridge needed
- White tuning (2700-5000K) and dimming to 5% via app and Controllers; 90CRI



Catalog Number	Product Description	Replaces Up To	Selectable CCT (via App)	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HHA19089BLE40A	A19 Smart Lamp, Bluetooth	65W INC	2700K-5000K	120V	White	800	10	1,536	080083885268	2344307

HALO Home Controllers

HALO Home Controllers work like remote controls around the home. Use the HALO Home app to tell them what to control and then they will send Bluetooth messages to that Device or Group - wirelessly controlling lighting. Add the optional Bridge to enable users to control lighting from anywhere in the world and with their voices via Amazon Alexa or Google Assistant.

In-Wall Accessory Switch

- Wireless ON/OFF remote control of HALO Home Smart Lights, Smart Dimmers and Smart Switches
- Easy setup using the app on any smartphone or tablet
- Can provide constant power to HALO Home Smart Lights
- Max Pass-Thru Loads: 720W Incandescent; 600W CFL/FL/LED/ELV; 1/2 HP motor
- Neutral wire required; indoor use only; Includes airgap switch to easily disconnect power



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWACS1BLE40AWH	In-Wall Accessory Switch, Bluetooth	120V	White	N/A	1,800	080083155392

In-Wall Accessory Dimmer

- Remote control dimmer wirelessly commands any HALO Home device or group
- Use multiple Accessory Dimmers for multi-way control of HALO Home Smart Lights
- Bluetooth enabled; No internet or bridge needed
- Provides constant power for up to 300W HALO Home Smart Lights
- Neutral wire required; Includes an airgap switch to easily disconnect power



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWAC1BLE40AWH	In-Wall Accessory Dimmer, Bluetooth	120V	White	N/A	2,220	080083826544

Anyplace Dimmer

- Battery operated, no wiring necessary; ON/OFF and dimming
- Place the remote dimmer anywhere in the home to control any HALO Home device or group
- Bluetooth-enabled; No internet or bridge needed
- Easy setup, re-wire without wires
- Wirelessly control a single device like a lamp or an entire group like a kitchen or house



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWAS1BLE40AWH	Anyplace Dimmer, Bluetooth	N/A	White	N/A	672	080083811182

Multi-Room Scene Keypad

- Each button can control an individual device, a group or a scene
- Tap a button once for turn ON, press dim UP/DOWN to adjust lighting; tap twice for OFF
- Bluetooth-enabled; No internet or bridge needed
- Available in battery-powered or hardwired versions for installation with other switches or placed wherever centralized lighting control is needed



Controls HALO Home devices



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWSKB1BLE40AWH	Multi-Room Scene Keypad, Battery Powered, Bluetooth	N/A	White	N/A	1,728	080083859986
HIWSKA1BLE40AWH	Multi-Room Scene Keypad, Hardwired, Bluetooth	120V	White	N/A	1,920	080083859962

*Wallplates not included

Standalone Motion Sensor

- Battery-powered, Bluetooth wireless Motion and Daylight Sensor
- Install on or in-wall with provided brackets & hardware; Simple installation with no wiring
- Use the HALO Home app & program to trigger HALO Home Devices through the secure Bluetooth Network
- 110° field of view and 16-feet motion detection range
- 2-year estimated battery life; battery included



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWMSB1BLE40AWH	Standalone Motion Sensor	120V	White	N/A	1,792	080083150380

Smart Internet Access Bridge

- Access HALO Home lighting from anywhere by simply connecting the bridge to user's Wi-Fi
- Works with Amazon Alexa and Google Assistant for voice control
- Requires a router, internet connection and HALO Home compatible products
- Plugs into outlet receptacle between 5- and 45-feet from wireless router
- Wireless range up to 50 feet line-of-sight from first HALO Home device



Works With:



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWB1BLE40AWH	Smart Internet Access Bridge, Bluetooth	110/120V	White	N/A	576	080083811168

HALO Home Add-Ons

Add-Ons are Devices that add HALO Home wireless control to any standard lighting, adding smart features like groups, scenes or schedules. Control lights from the app at home, or install the optional Bridge to enable app-control from anywhere + voice control via Amazon Alexa or Google Assistant.

In-Wall Smart Switch

- Enables smart ON/OFF control of ceiling or exhaust fans along with any standard lighting
- To enable smart 3-way or multiway control, install and program an Accessory Switch to wirelessly command this Smart Switch
- Bluetooth enabled; No internet or bridge needed
- Max Loads: 720W Incandescent; 600W CFL/FL/LED/ELV; 1/2 HP motor
- Neutral wire required; indoor use only; Includes airgap switch to easily disconnect power



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWMAS1BLE40AWH	In-Wall Smart Switch, Bluetooth	120V	White	N/A	1,800	080083154371

In-Wall Smart Dimmer

- Add wireless control of standard non-smart lights
- Enable three or four-way control and wirelessly command using a Scene Keypad, Accessory or Anyplace Dimmer
- Bluetooth enabled; No internet or bridge needed
- LED Max Load: 300W; Incandescent/ELV/FLR/Halogen/MLV/CFL: 600W
- Neutral wire required; Includes an airgap switch to easily disconnect power



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWMA1BLE40AWH	In-Wall Smart Dimmer, Bluetooth	120V	White	N/A	1,920	080083826520

*Wallplates not included

Smart Plug-In Lamp Dimmer

- Conveniently control dimming and ON/OFF of standard floor and table lamps
- Add to groups or scenes and apply schedules using the HALO Home app
- Bluetooth-enabled; No internet or bridge needed
- Side button allows for manual ON/OFF and dimming control
- For use with 110/120V compatible sockets; Grounded 3-wire power connection
- LED Max Load: 150W; Incandescent/ELV/FLR/Halogen/MLV/CFL: 300W



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWP1BLE40AWH	Smart Plug-In Lamp Dimmer, Bluetooth	110/120V	White	N/A	1,920	080083826506

HALO COMMERCIAL RECESSED COMMERCIAL DOWNLIGHT



Downlight
p.31



PR4 LED SeleCCTable™ Downlight Series

HALO Commercial

- 4-inch LED self-flanged, lensed recessed downlight
- Available in new construction, retrofit and surface-mount cylinder
- Field selectable lumens: 1000, 1500, 2000
- Field selectable CCT: 3000K, 3500K, 4000K
- Exclusive medium / wide beam distribution reversible flip lens



Catalog Number	Product Description	Finish	Replaces up to	Selectable CCT	Voltage	Selectable Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
PR4FS12D010	4" Housing	Raw Finish	26W-32W	N/A	120-277V	1000/1500 /2000	11	90	080083131839	2353549
PR4M12MD8FSMW	4" LED Module	Matte White	26W-32W	3000K/3500K/4000K	120-277V	1000/1500 /2000	22	144	080083060795	2353549
PR4RFS12D010	4" Retrofit Frame	Raw Finish	26W-32W	N/A	120-277V	1000/1500 /2000	22	72	080083132683	2353549
PR4SFS12D010MW	4" Cylinder, Surface Mount	Matte White	26W-32W	N/A	120-277V	1000/1500 /2000	22	108	080083133581	2353549

Specify two parts: LED module and housing, retrofit or surface mount cylinder

Downlight

PR6 LED SeleCCTable™ Downlight Series

HALO Commercial

- 6-inch LED self-flanged, lensed LED recessed downlight
- Available in new construction, retrofit and surface-mount cylinder
- Field selectable lumens: 1000, 1500, 2000
- Field selectable CCT: 3000K, 3500K, 4000K
- Medium and wide interchangeable lens option included
- Specify two parts: LED module and housing or surface mount cylinder



Catalog Number	Product Description	Finish	Replaces up to	Selectable CCT	Voltage	Selectable Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
PR6FS12D010	6" Housing	Raw Finish	26W-32W	N/A	120/277V 50/60 Hz	1000/1500/2000	21	72	080083892174	2328770
PR6M12MD8FSMW	6" LED Module	Matte White	26W-32W	3000K/3500K /4000K	N/A	1000/1500/2000	N/A	72	080083891122	2345484
PR6RFS12D010	6" Retrofit Kit	Raw Finish	26W-32W	N/A	120V-277V 50/60 Hz	1000/1500/2000	22	72	080083891726	2345457, 2345484
PR6SFS12D010MW	6" Cylinder, Surface Mount	Matte White	26W-32W	N/A	120V-277V 50/60 Hz	1000/1500/2000	21	72	080083891276	2328770

PR8 LED SeleCCTable™ Downlight Series

HALO Commercial

- 8-inch LED self-flanged, lensed recessed downlight
- Available in new construction, retrofit and surface-mount cylinder
- Field selectable CCT: 3000K, 3500K, 4000K
- Universal input 120V-277V with 0-10V 1% dimming
- Specify two parts: LED module and housing, retrofit or surface mount cylinder



Catalog Number	Product Description	Finish	Replaces up to	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
PR830D010	8" Housing	Raw Finish	65W	N/A	120V-277V	3000	28	36	080083771790	2289674
PR8M34MDMW	8" LED Module	Matte Finish	65W-85W	3000K/3500K/4000K	Low Voltage	3000-4000		240	080083772940	2289767
PR8R30D010	8" Retrofit Kit	Raw Finish	65W	N/A	120V-277V	3000	28	480	080083772193	2289686
PR8S30D010MW	8" Cylinder, Surface Mount	Matte White	65W	N/A	120V-277V	3000	28	108	080083772599	2289685