


# Flip Up In-Desk Connectivity with 1x Mains (North America/Multi-Standard), USB Charging, 2x HDMI, USB-C & RJ-45 Passthrough

IDB-400-NA | IDB-400-MS

# WyreStorm®

## Specification Sheet

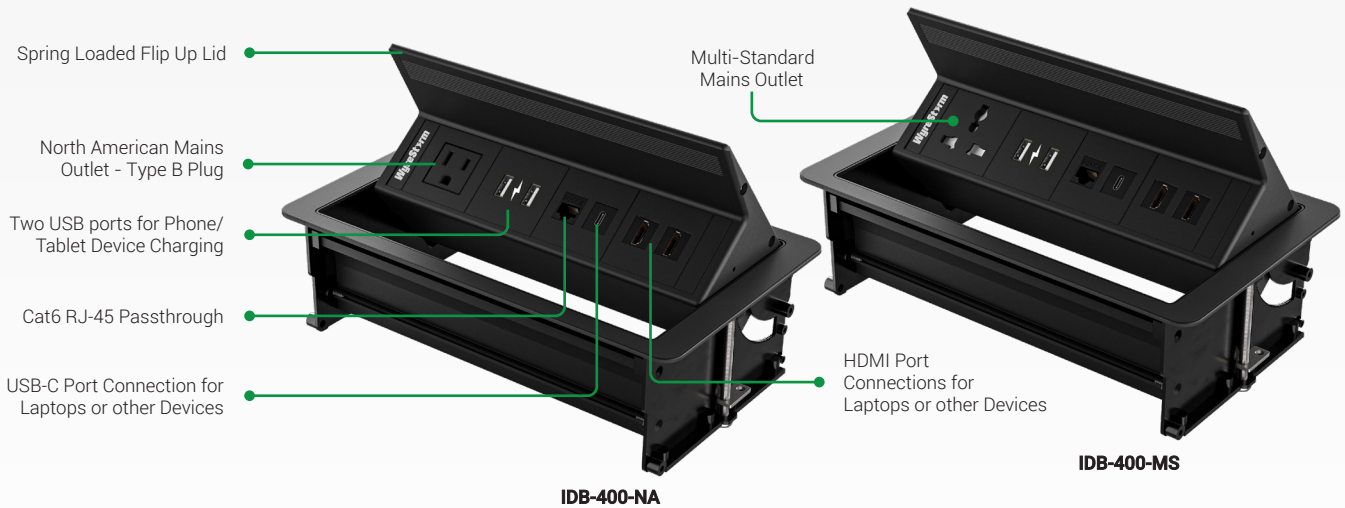

4K HDR HDMI HDCP 2.2

WyreStorm - Powerful. Reliable. Simple.

## Introduction

The IDB series in-desk connectivity products are simple to use solutions for corporate or education applications. Easy to install into a desk or table, the IDB-400 offers a broad range of connectivity for your meeting, lecture, or classroom. The spring-loaded flip up design allows you to simply push on the lid to expose the ports. The IDB-400-NA includes a North American Type B mains outlet, whereas the IDB-400-MS includes a multi-standard outlet for the UK and other European countries.

## Key Features

- Multiple connection options including: 1x Mains, USB Charging, 2 x HDMI, USB-C and RJ-45 passthrough
- HDMI and USB-C connections support up to 4K UHD video passthrough
- 2x USB Type A charging ports for connecting mobile devices such as smartphones or tablets
- Spring-loaded flip up design allows you to simply push on the lid to expose the ports
- Pair with a WyreStorm presentation switch to build your meeting space solution, such as the SW-740-TX, Apollo series and more!
- Use the IDB-CBL-SPINE to neatly organize cables under the desk
- Optional Weiland to UK & Schuko 2 meter cables available for 'MS' models (IDB-PWR-UK & IDB-PWR-SCH)

## In the Box

1x IDB-400 NA or IDB-400-MS

# Specifications

	IDB-400-NA	IDB-400-MS
<b>Audio and Video</b>		
<b>Inputs</b>	1 x Mains outlet (North American Type B) 1 x USB-C 2 x HDMI 1 x RJ-45 2 x USB Type A Charging Ports	1 x Mains outlet (Multi-standard) 1 x USB-C 2 x HDMI 1 x RJ-45 2 x USB Type A Charging Ports
<b>Video Resolutions (Max)</b>	3840x2160 @60Hz 4:4:4 8bit	3840x2160 @60Hz 4:4:4 8bit
<b>Power</b>		
<b>Mains Connection</b>	Voltage: 100-250VAC Current: Max: 16A Frequency: 50-60Hz  Integrated 3 meter mains cable (Type B plug) Total power of simultaneously connected devices must not exceed 3.6kW	Voltage: 100-250VAC Current: Max 16A Frequency: 50-60Hz  Integrated 40cm Weiland connector (EPN 1114) Total power of simultaneously connected devices must not exceed 3.6kW
<b>USB Charging</b>	5v 2.4a per port	
<b>Environmental</b>		
<b>Operating Temperature</b>	0 to +45°C (32 to + 113 °F), 10% to 90%, non-condensing	
<b>Dimensions and Weight</b>		
<b>Length x Width x Height</b>	Top surface: 151.3mm x 256mm Under table depth: 76.3mm Under table width: 243mm Can be mounted in surfaces between 12-60mm thick.	
<b>Weight</b>		
<b>Regulatory</b>		
<b>Safety and Emission</b>	CE   FCC   RoHS   RCM   EAC	

**Note:** WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.