

Locking-Type Photo Controls

Suitable for wet locations

- UV-stabilized polycarbonate housing is translucent, with color-coded band for voltage identification.
- Meet NEMA standards for locking-type devices.
- With solid brass plug blades to provide greater electrical dependability and maximum resistance to corrosion.
- Minimum turn on: 5 foot candles; maximum turn off: 15 foot candles.
- With 1/2" cadmium sulfide cell.
- Built-in time delay prevents any false switching at night due to light from vehicles, lightning, etc.
- Normally closed contact position at night.
- Temperature range: -40°F (-40°C) to 149°F (65°C).
- Dimensions: 2 3/4" high, 3" in diameter.
- UL Listed for use in the United States and Canada.



Catalog No.	Voltage	Tungsten (watts)	Ballast (volt amps)	Carton Quantity	Weight per 100 units
30834	120	1000	1800	10	30 lbs.
30837	208-277	1000	1800	10	30 lbs.
30842	480	1000	1800	10	30 lbs.
30844	120-277	1000	1800	10	30 lbs.




Mounting Bracket

Catalog No.	Voltage	Tungsten (watts)	Ballast (volt amps)	Carton Quantity	Weight per 100 units
30862*	(locking-type receptacle with L-shaped mounting bracket)			12	67 lbs.
30846**	(shorting cap)			10	20 lbs.

*UL Recognized Component.

** Shorting cap keeps lights on at all times unless turned off from a remote location.

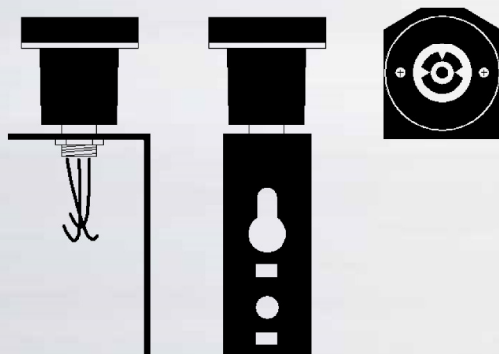

Shorting Cap