

Type
Project
Catalog No.
Lamp/Wattage

**NHRIC-17QAT / NHRIC-17QNBAT**  
**6" IC Air-Tight Line Voltage Remodel Housing**

Source: 100W Max. (Varies with trim)

**PRODUCT DESCRIPTION**

Remodel housing for use in existing sheet rock, insulated ceilings can be in direct contact with thermal insulation. Air-tight construction provides energy savings by reducing the flow of air through the ceiling.

**FEATURES**

- Rated for direct contact with insulation
- cULus listed for damp location and through branch circuit wiring
- Quick connect provided
- Installation-ready for existing sheet rock ceilings
- Accommodates 1-3/8" maximum ceiling thickness

**CONSTRUCTION**

**Housing**

0.040 aluminum adjusts to a maximum ceiling thickness of 1-3/8" (35mm). Housing terminates at 1/4" ceiling flange for even positioning of housing angle within the ceiling. Structural arm consisting of 0.050 structural steel connects housing with junction box. Fixture may be installed in areas where it will have direct contact with thermal insulation.

**Air Flow Restriction**

Housing has factory installed gaskets to restrict airflow from room into ceiling plenum to <2CFM (cubic feet per minute) in accordance with ASTM-283 Air-Tight requirements.

**Socket**

**NHRIC-17QAT:**

Galvanized steel socket plate adjusts inside housing for optimum light performance. Contains a single medium base socket. Protective cap included to protect socket interior during ceiling painting. Socket plate can be removed in the field to convert to a floating socket.

**NHRIC-17QNBAT:**

Socket is free floating and installs to eyeball, gimbal ring and new trims equipped with socket brackets. Protective cap included to protect socket interior during ceiling painting.

**Mounting**

Four high tension springs secure the housing to an existing sheet rock ceiling. Accommodates ceiling thickness to 1-3/8" (35mm).

**Junction Box**

Plaster frame integrated 15 cu. in. junction box 0.064 galvanized steel with five 1/2", two 3/4" knockouts, and four Romex® pryouts. Electrical grounding automatic when feeding with grounded steel EMT pipe or flex. Green wire provided for installations with ground wire fed through PVC pipe conduit.

**Quick Connect Feature**

Housing contains three UL approved quick connections that allow insertion of 1/4" stripped solid or tinned standard conductors to be inserted into the connector. Connectors are pre-attached to fixture power, common, and ground circuits.


**Thermal Protector**

Standard UL thermal protector rated for 90°C is affixed to inner top surface of housing.

**Lamp**

100W max. - lamp and wattage varies with trim (ordered separately)

**DIMENSIONS**

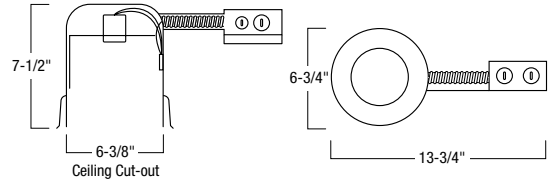

Cut-out: 6-3/8"  
ID: 6"

Housing Length: 13-3/4"  
Housing Width: 6-3/4"  
Housing Height: 7-1/2"

**Labels and Listings**

cULus Listed for Damp Location w/ Feed Through  
 cULus Wet Listed (Only with designated trims)  
 Meets or exceeds ASTM-283 Air-Tight Requirements  
 Washington State Approved  
 NYC Approved: Calendar #43895



**Housings**

- NHRIC-17QAT:** 6" IC Air-Tight Line Voltage Remodel Housing, Adjustable Socket Bracket
- NHRIC-17QNBAT:** 6" IC Air-Tight Line Voltage Remodel Housing, Floating Socket (No Bracket)