




**Planet Waves Single Conductor Pre-Wire Coaxial Cable is precision manufactured in the USA to 75 ohm HD standards.**

All cable features our In=Out™ Technology for pure signal transparency. This cable is full bandwidth, broadcast quality with high impedance and low capacitance, enabling use for all audio/video applications.

The same cable can be used for everything from Component to Composite Video, Analog to Digital Audio, Subwoofers, S/PDIF, or RF applications like HD Satellite and CATV.

Planet Waves Pre-Wire PVC jacket is slick and rigid in order to make pulling faster and easier with far fewer snags.

All Planet Waves cable must be used with Planet Waves connectors to ensure proper termination.

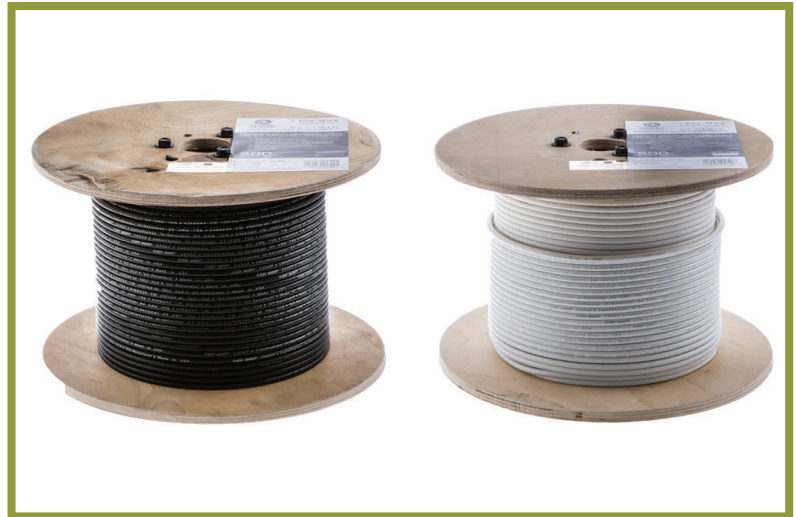

**Product Specifications**

Manufacturing	Made in USA
Standard	75 ohm HD
Sweep Testing	3 Ghz over 100 ft, nominal dB loss
Nominal Capacitance	18.2 pF/ft
Construction	Standard bare copper Nitrogen-gas-injected foam PE dielectric
Shielding	100% Shielding with 80% aluminum braid & tin foil sheath
Jacket	PVC
Rating	CM & CL2
Max Pulling Tension	2359 PSI
Max Bend Radius	2.25 inches
Compatibility	Planet Waves Connectors
Jacket Color Options	Black, White

Part Numbers	Description	UoM
CXSCP500	Pre-Wire Coax-Single - Black	500 ft Spool
CXSCP500W	Pre-Wire Coax-Single - White	500 ft Spool