
PLC-9-H-835-BYP



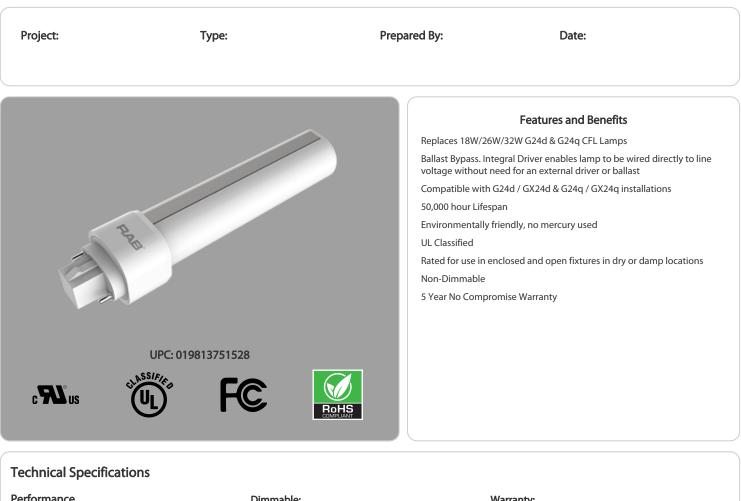

Performance	Dimmable:	Warranty:		
Product Type:	No	RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u>		
Compact	Construction			
Input Wattage:	Bulb Shape:			
9W	PLC			
Lumens (Nominal):	Finish:			
950lm	Frosted	LED Characteristics		
Efficacy:	Base Type:	Color Temperature:		
106 lm/W	G24d 3500K Neutral White			
Color Accuracy (CRI):	For Use Outdoors in Open Fixtures:	Electrical		
82 CRI	No	Power Factor:		
L70 Lifespan:	Other			
50,000 Hours	Equivalency: Operating Temperature:			
	26W Fluorescent	-20°C - 45°C		
		Input Voltage:		
		120-277V AC		

PLC-9-H-835-BYP

Technical Specifications (continued)					
Electrical	Electrical Characteristics	CEC Status:			
Operating Frequency:	THD:	Lawful for sale in California			
50/60Hz	<20%	Application:			
Installation	Compliance	Suitable for damp locations and totally enclosed			
Installation Type:	UL Recognized:	fixtures.			
Type B, Ballast Bypass	Yes				
Installation Orientation:	UL Classified:				
Horizontal	Yes				

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	6.5	4.9	7.1
PALLET	4032	47.2	39.4	49.6

