



The light you want, where you want it.

CCT-selectable wafers with adjustable gimbals.



- A** Spring-loaded retention tabs
- B** Cast aluminum housing and trim
- C** Pivoting gimbal lens
- D** Powder coat finish
- E** IC rated for direct contact with insulation
- F** Off-board driver

Off-board driving.


Installations are really flexible with an off-board driver that minimizes installation height, maximizes thermal management, and eliminates the need for a recessed housing. A plenum-rated cable connector links the downlight module to the remote driver, and then the module snaps into place with the adjustable, spring-loaded retention tabs. The super-thin design allows for these products to be installed inside shallow plenums.



REMOTE DRIVER



ROMEX CONNECTOR

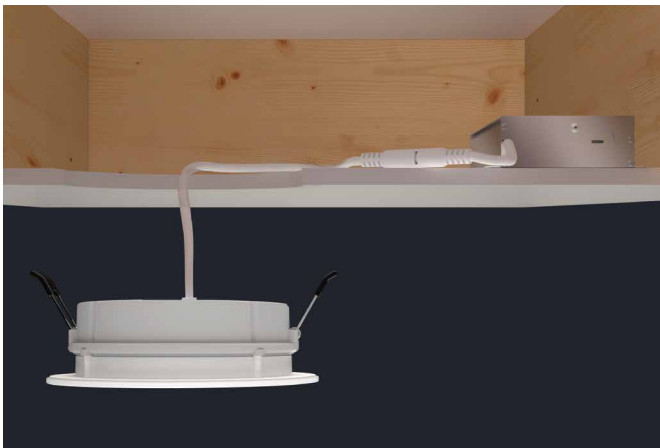



50,000-HOUR
LED LIFESPAN



5-YEAR, NO COMPROMISE
WARRANTY

RAB's warranty is
subject to all terms
and conditions found at
rablighting.com/warranty



Gimbal models have a 25°
tilt and 360° rotation for
directional lighting control.

Ambient or accent lighting...you choose.

This line of downlights was designed to simplify the process of installing tailored lighting in challenging locations. All models use a diffusion lens to create smooth, uniform light.



Accessories

Unlike many common residential-use downlights, this entire family works with our emergency back-up driver, which will power the fixture for a minimum of 90 minutes in the event of a power failure. The driver includes an emergency test switch. An optional t-grid bracket accessory is available (*sold separately*).

Anywhere you want it.

All models are IC rated for direct contact with insulation and suitable for use in dry, damp and wet locations, making them perfect for both indoor and outdoor use. Extension power cables are available in three sizes to help you get these lights exactly where you need them.



90 CRI
available



Dimmable
down to 10%

We've got the basics covered.

Available in 4" and 6" models and with five selectable color temperatures, these wafers deliver 90+ CRI for accurate color rendering and are dimmable with most standard TRIAC dimmers (120V).

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim
WFRLA	4 6	R Round	8 8W 12 12W	9FA 90CRI Field Adjustable	120 120V	W White	S Smooth