

Pass & Seymour


Health Care

Hospital Grade Devices Heavy-Duty Decorator Receptacles Tamper-Resistant 15 & 20A, 125V

TR26262-HG, TR26362-HG


Sturdy tamper-resistant receptacles in Decorator-style.

leek, ergonomic Decorator-style matches other Decorator devices while giving the same performance and ease of installation as our standard tamper-resistant devices. The thermoplastic dual mechanical shutter system helps prevent children from sticking objects into the receptacle. They feature screw-pressure-plate back wiring and a back wire clamp on the ground terminal.

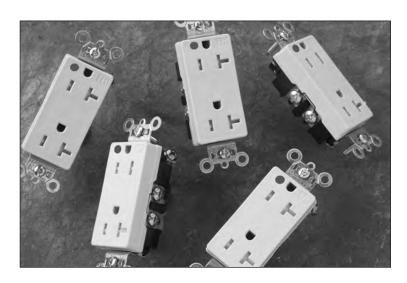

Multiple Dwelling

Features & Benefits

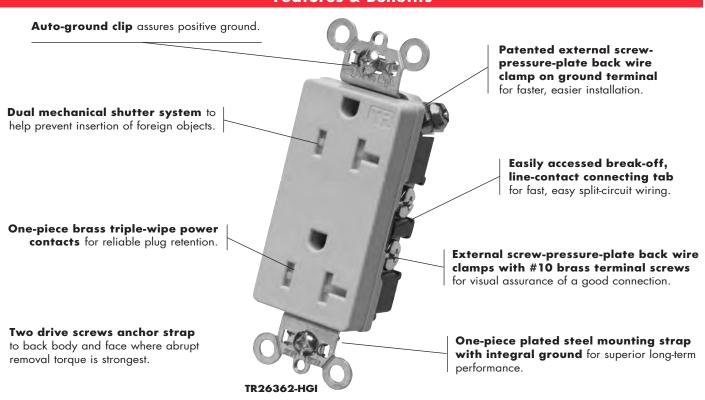

Field Uses/Vertical Markets

Institutional

Education



Hospital Grade Devices Heavy-Duty Decorator Receptacles Tamper-Resistant 15 & 20A, 125V

Ordering Information

Catalog Number	Rating A. V.	Color	NEMA Config. No.		
Duplex Receptacles Back & Side Wire					
TR26262-HGI	15 125	Ivory	5-15R		
TR26262-HGW	15 125	White	5-15R		
TR26262-HG	15 125	Brown	5-15R		
TR26262-HGGRY	15 125	Gray	5-15R		
TR26262-HGBK	15 125	Black	5-15R		
TR26262-HGRED	15 125	Red	5-15R		
TR26262-HGLA	15 125	Light Almond	5-15R		
TR26362-HGI	20 125	Vhite Brown	5-20R		
TR26362-HGW	20 125		5-20R		
TR26362-HG	20 125		5-20R		
TR26362-HGGRY	20 125	Gray	5-20R		
TR26362-HGBK	20 125	Black	5-20R		
TR26362-HGRED	20 125	Red	5-20R		
TR26362-HGLA	20 125	Light Almond	5-20R		





NEMA 5-15R

NEMA

Hospital Grade Devices Heavy-Duty Decorator Receptacles Tamper-Resistant 15 & 20A, 125V



Technical Specifications

3rd Party Compliance

UL Listed, File Number E140596, Standard UL498. Federal Specification WC596, Hospital Grade. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Performance		
Electrical		
Dielectric Voltage	Withstands 2000V minimum	
Maximum Working Voltage	250V	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current	
Mechanical		
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)	
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only	
Product Identification	Ratings are a permanent part of the device	
Environmental		
Flammability	UL94 V2	
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact	

1.322" -		
1 -	3.0	3.81"
1 1	2.635"	
.833"		

Dimensions for 15 & 20 Amp

Materials			
Face Back Body Line Contacts Mounting Strap Ground Contacts Pressure Plate Tamper Shutter	Nylon Nylon .036 688 Brass Plated Steel Strap with Integral Ground .031 260 Brass Thermoplastic	Ground Screw Assembly Drive Screw Auto-Ground Clip Mounting Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel) #10 Hex Tri-Drive Brass Zinc-Plated Steel Steel Tri-Drive Steel

Warranty

1 Year

Complementary Devices & Accessories



HOSPITAL GRADE DEVICES

- Receptacles, Tamper-Resistant, Decorator
- GFCIs
- **■** TVSS
- Isolated Ground
- Plugs & Connectors



DECORATOR DEVICES

- Construction Grade Switches
- Specification Grade Combo Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights




STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Hard Use
- Construction Grade
- Construction Grade Leaded
- Commercial Grade



SWITCHES

- Extra Heavy-Duty
- Extra Heavy-Duty Lighted
- Extra Heavy-Duty Security
- Extra Heavy-Duty Locking
- Hard Use
- Commercial Grade



GFCIs

- Specification Grade
- Dead Front



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Screwless Polycarbonate
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

Also available...

- Light Almond Devices
- PlugTail™ Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok®
 Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions



Legrand/Pass & Seymour P.O. Box 4822

Syracuse, NY 13221-4822 800-223-4185 North America Headquarters 60 Woodlawn Street

West Hartford, CT 06110 Phone: 1.877.BY.LEGRAND (295.3472) Fax: 1.860.232.2062 www.legrand.us Legrand Canada 570 Applewood Crescent Vaughan, ON, L4K 4B4 Phone: 905.738.9195 Fax: 905.738.9721 www.legrand.ca