

Rigid Elbows 45° - Aluminum

Features

- 45 degree elbows are available from 1/2" thru 4"
- Manufactured from 6063 Aluminum Alloy for lightweight and corrosion resistant protection
- NPT threads are protected with color coded threaded end caps
- UL listed, UL6 / ANSI C80.5

Application


- For use in harsh or clean environments such as waste-water treatment, food processing, oil refineries, paper mills, and power plants

Standard Material

- 6063 aluminum alloy



UL listed, UL 6 and ANSI C80.5

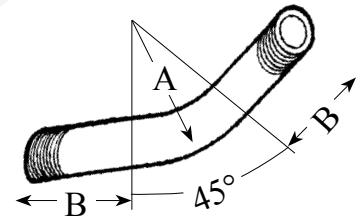

Catalog Number	UPC	Pipe Size	Ship Case	Weight/Case	(A) Min. UL Radius	(B) Straight Leg Each End
11AL	87250	1/2"	50	12	4	1.89
12AL	87251	3/4"	50	18	4.50	2.13
13AL	87252	1"	35	20	5.75	2.28
14AL	87253	1-1/4"	30	28	7.25	2.76
15AL	87254	1-1/2"	15	20	8.25	3.27
16AL	87255	2"	15	32	9.50	3.94
17AL	87256	2-1/2"	1	4	10.50	4.53
18AL	87257	3"	1	6	13	5.91
19AL	87258	3-1/2"	1	8	15	7.09
20AL	87259	4"	1	10	16	7.87