

Base Spacers

Features


- Proven base plate design maintains consistent vertical separation between trench floor and first duct tier
- Two-piece interlock design eliminates banding
- Resistant to extreme temperature fluctuations
- Available in 16 sizes
- Snap lock design for fast field assembly
- Stays firmly in place during fill
- Heavy duty strut evenly distributes load

Applications

- Support duct arrays within trenching before encasement
- For use with Topaz Intermediate Spacers

Standard Material

- High impact polymers

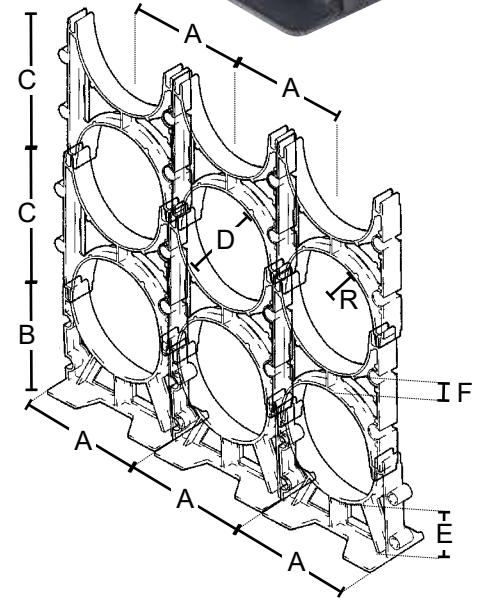

Catalog Number	UPC	Spacer Size	Ship Case	Weight/Case	A	B	C	D	E	F	R
1347	23342	4 x 1"	250	50	5.63	4.06	5.63	4.63	3	1	2.315
1348	23343	2 x 1-1/2"	450	65	3.975	4.25	3.985	2.5	3	1.5	1.25
1349	23344	3 x 1-1/2"	250	48	5.13	4.81	5.13	3.63	3	1.5	1.815
1350	23345	4 x 1-1/2"	180	47	6.13	5.315	6.13	4.63	1.75	1.5	2.315
1351	23346	5 x 1-1/2"	140	43	7.325	5.9	7.325	5.69	3	1.5	2.845
1352	23347	6 x 1-1/2"	100	33	8.23	6.375	8.25	6.75	3	1.5	3.375
1353	23348	2 x 2"	325	48	4.46	4.25	4.46	2.5	3	1.5	1.25
1354	23349	3 x 2"	225	44	5.63	4.81	5.63	3.63	3	2	1.815
1355	23350	4 x 2"	180	47	6.61	5.315	6.63	4.63	3	2	2.315
1356	23351	5 x 2"	100	32	7.833	5.9	7.83	5.69	3	2	2.845
1357	23352	6 x 2"	100	34	8.73	6.375	8.73	6.75	3	2	3.375
1358	23353	2 x 3"	300	48	5.465	4.255	5.46	2.5	3	3	1.25
1359	23354	3 x 3"	190	41	6.63	4.81	6.63	3.63	3	3	1.815
1360	23355	4 x 3"	150	43	7.61	5.315	7.625	4.63	3	3	2.315
1361	23356	5 x 3"	90	30	8.69	5.9	8.69	5.69	3	3	2.845
1362	23357	6 x 3"	90	32	9.79	6.375	9.75	6.75	3	3	3.375