




An edge-lit wafer for every need.

The broadest field-adjustable wafer family out there.

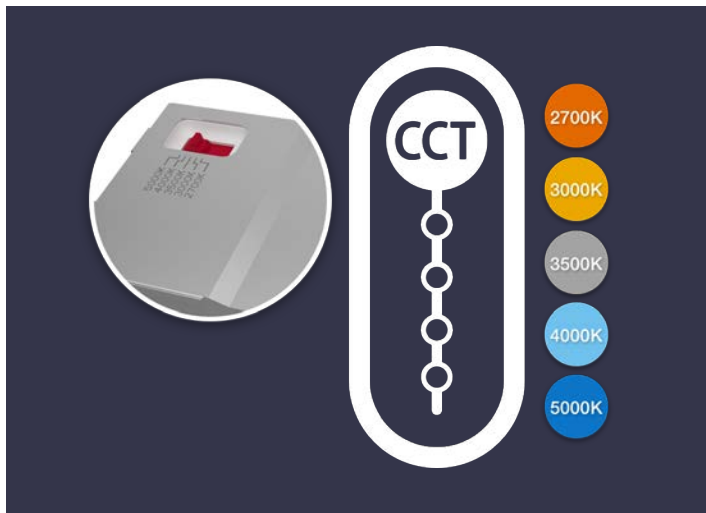


Five color temperatures to choose from.

These wafers all have field-selectable CCT, making changes as easy as the flick of a switch.




Countless design options.

This incredibly versatile line has an option for every need. Wafers are available in 3, 4, 5, 6, and 8" models with either smooth or baffle trims. Square models are also offered, and for a completely flush look, there are shallow wafers.

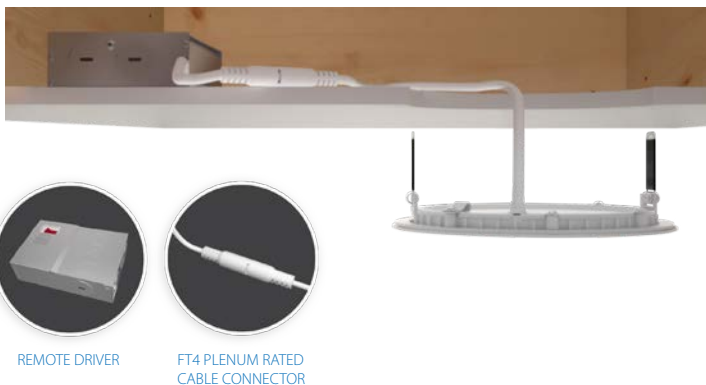

Remote driver.

Installations are super flexible with an off-board driver that minimizes installation height and eliminates the need for a traditional recessed housing.

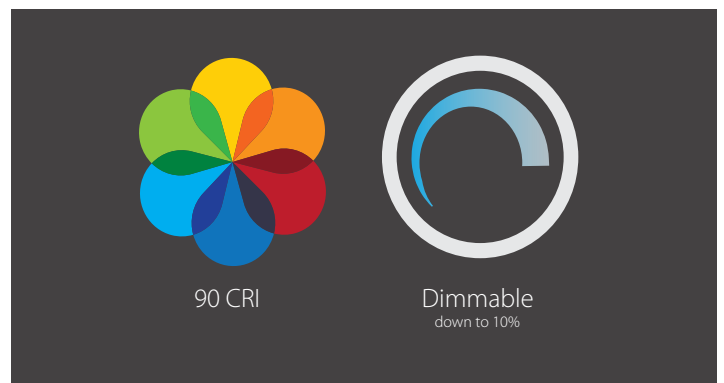

Economy that performs.

All wafers are dimmable—TRIAC for 120V models and 0-10V/TRIAC for Universal Voltage models. 90 CRI provides accurate color rendering, making them ideal for commercial applications where color is critical.



5-YEAR,
NO-COMPROMISE
WARRANTY

RAB's Warranty is
subject to all terms
and conditions found at
rablighting.com/warranty

*Only select models are
IC rated. See rablighting.com
for model specification.

Also available...



Ordering Matrix

Product Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim	Trim Depth
3 INCH								
WFRL	3	R	6	9CCT	120	W		
	3 3"	R Round	6 6W	9CCT 90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable	120 120V	W White	B Baffle S Smooth	
4 INCH								
WFRL	4			9FA	120	W		
	4 4"	R Round S Square	9 9W 10.5 10.5W	9FA 90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable	120 120V	W White	B Baffle S Smooth	Blank Standard S Shallow*
*Only available with round, baffle trim								
5 INCH								
WFRL	5	R	12	9CCT	120	W		
	5 5"	R Round	12 12W	9CCT 90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable	120 120V	W White	B Baffle S Smooth	
6 INCH								
WFRL	6			9FA		W		
	6 6"	R Round S Square	13 13W 14 14W	9FA 90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable	120 120V D 120-277V	W White	B Baffle S Smooth	Blank Standard S Shallow*
*Only available with round, baffle trim								
8 INCH								
WFRL	8	R	23	9FA		W		
	8 8"	R Round	23 23W	9FA 90CRI, 5000K/4000K/3500K/3000K/2700K Field Adjustable	120 120V D 120-277V	W White	B Baffle S Smooth	