



# Metal While-In-Use Weatherproof Covers


## Die Cast Aluminum

MORRIS CAT#'s: 38912-38917




ONE GANG

7 IN I




TWO GANG

31 IN I



EXTRA-DUTY RATED  
PER 2014 NEC 406.9(B)(1)  
EXTRA DUTY STD.

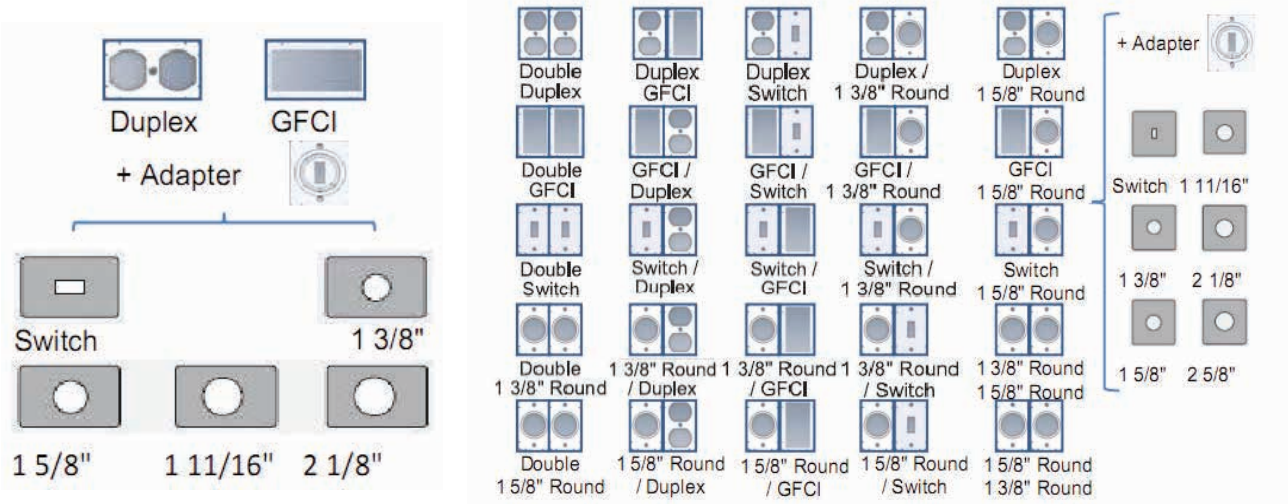

### Features:

- Weatherproof While-in-Use - Complies with NEC 2005 406.8 (B)(1) for receptacles in damp or wet locations & 2011 NEC 406.9(B)(1) Extra Duty Standard
- 1 gang - 7 Device Configurations 2 gang - 31 Device Configurations
- Patented Cover Adjustable from 2-3/4" Depth to 3-1/2" Depth if Extra Clearance is Required (2 Gang Adjustable from 3-1/2" to 4-1/2" Depth)
- One Gang Covers Can Be Mounted Vertically or Horizontally
  - See Table Below
- Heavy Duty Reinforced Hidden Hinge - 40lb Force Rating
- Sturdy Die-Cast Aluminum Construction
- Built-In Water Dam Design channels moisture away from interior
- Extra Large Cable Exit - Prevents Ingress of Moisture/ Debris
- Lockable Latching Tab secures cover to Prevent Accidental Disconnects
- Pre-Installed Gasket
- Easy-To-Assemble Building Block Style Snap-In Device Adapter requires no tools and provides flexibility and eliminates damage
- NEMA 3R rating
- cULus 514D Listed; NEMA FB-1; Federal Spec. A-A-50563
- Ground Lug Included

DIMENSIONS = INCHES

CAT. NO.	DESCRIPTION	COLOR	DIMENSIONS					CASE QTY
			A	B	C	D	E	
38915	1 GANG - VERTICAL	GRAY	4.60"	3.10"	3.00"	6.80"	3.50"	10
38912	1 GANG - VERTICAL	WHITE	4.60"	3.10"	3.00"	6.80"	3.50"	10
38916	1 GANG - HORIZONTAL	GRAY	4.60"	3.10"	3.00"	6.80"	3.50"	10
38913	1 GANG - HORIZONTAL	WHITE	4.60"	3.10"	3.00"	6.80"	3.50"	10
38917	2 GANG DEEP - VERTICAL	GRAY	4.60"	4.60"	3.20"	6.80"	5.25"	10
38914	2 GANG DEEP - VERTICAL	WHITE	4.60"	4.60"	3.20"	6.80"	5.25"	10