



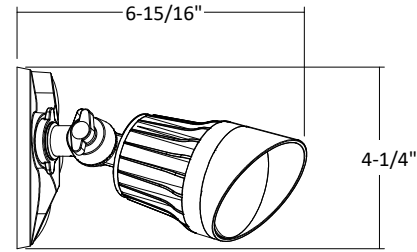

MORRIS CAT#: 72580A

LED Round 2-Head Security Light

120-277V, 20W, 5000K

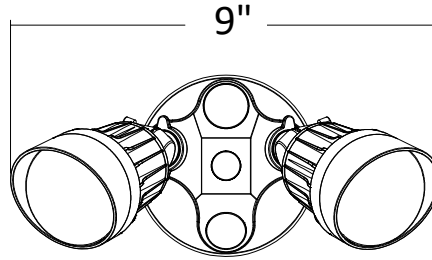

Features:

- Not Motion Activated - No Photocell
- Used for Walkways, Entrances, and Patios
- Good Heat Dissipation
- Wall or Eave Mounted to Standard Junction Box

5 Year Limited Warranty



IP65 rated

Certification: cETL

Environment: Suitable for Wet Locations

| Part# | Input/Wattage | Volts | Lumens | CCT | CRI | Dimming | Light Pattern | Lumens/Watt |
|--------|---------------|---------|--------|-------|-----|---------|---------------|-------------|
| 72580A | 20 | 120-277 | 1,900 | 5000K | >72 | N/A | Outdoor | 95 |

PHOTOMETRY

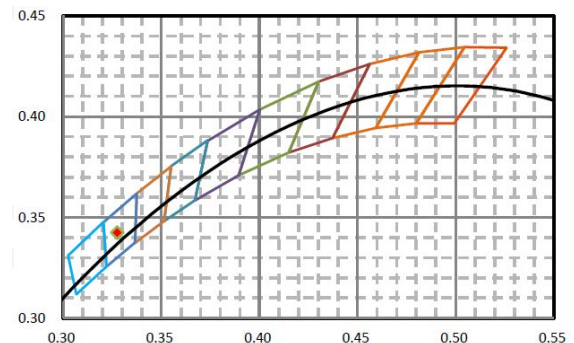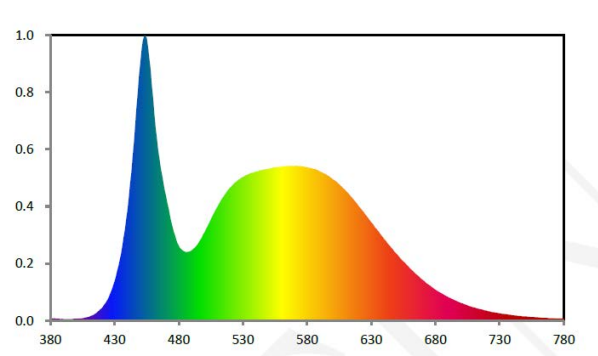



MORRIS CAT#: 72580A

LED Round 2-Head Security Light

120-277V, 20W, 5000K

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: .16A@120V

Frequency: 50/60Hz

Power Factor: \geq .98

THD: >20%

Product Parameters:

Input Watts: 20W

Lumens: 1,900

Efficacy: 95 lumens per watt

30,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromacity Measurements:

Beam Angle: 49° per head

CRI: >72

R9: 94

Component Specifications:

LED: Lumileds 3030

120-277V, 50-60Hz

Dimming: N/A

Operating Temperature:

Minimum Starting: -4°F to 122°F

Construction:

Housing: Aluminum Alloy

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Polycarbonate

Mounting: Wall or Eve Mounted to
Standard Junction Box

Listings: ETL,

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).